


StandardCORE

Modern, Versatile, Simple Installation

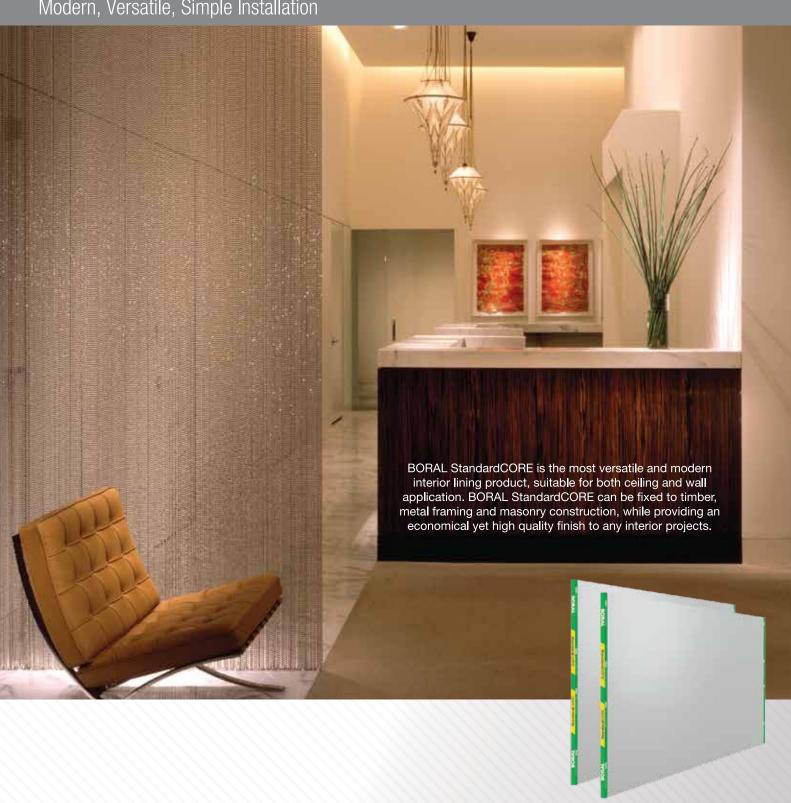


BORAL StandardCORE

BORAL StandardCORE is an interior wall and ceiling lining product, with significant properties for durability and stability. BORAL StandardCORE is composed of a gypsum plaster core encased in heavy-duty face and backing liner. The product is environmentally friendly, and non-hazardous to work with.


Product Data

Thickness	Metric (mm)	9.5mm, 12.5mm, 16mm
Edge Details:	Recessed Edge	Yes
	Square Edge	Yes
Width (mm):	Metric	1200, 1220
Length (mm):	Metric	2400, 2440, 2700, 2743, 3000, 3048
Weight:	9.5mm = 6.40kg/m², 12.5mm = 7.65kg/m², 16mm = 11.80kg/m²	
Product Standard:	BS 1230 part 1, ASTM C36	
Product Testing:	BS 1230 part 1, BS 476 part 4 / part 6 / part 7, ASTM C473	

The above lengths are standard sizes, Boral Plasterboard is able to produce any required sheet length depending upon the order size.

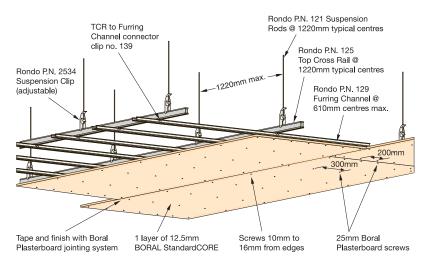

BORAL StandardCORE Ceiling System

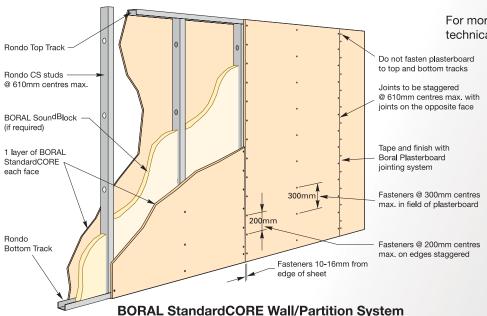

Product Enhancement of BORAL StandardCORE





Aluminum Foil

PVC

Protective Backing:

Upon request BORAL StandardCORE can be provided with a special backing on the Plasterboard reverse side:

- Aluminium Foil Backing is designed to use in areas of extremely high temperature.
- PVC Backing is designed for high humidity area to prevent sagging. It acts as a barrier against moisture.

Remarks:

- 1. Design based on AS/NZS 2785
- 2. Ultimate limit state: 1.4 G + 1.7 U
- 3. Serviceability limit state: G + U
- G: System self-weight U: Service load

How to specify this product:

Supply and install BORAL StandardCORE 9.5mm/12.5mm/16mm as shown on the relevant drawings. BORAL StandardCORE must be installed and finished in accordance to manufacturer's specification.

For more information, please contact our technical service.



Boral Plasterboard (Malaysia) Sdn Bhd

Head Office:

Lot 606, Off Jalan SS13/1K 47500 Subang Jaya Selangor Darul Ehsan Malaysia t (603) 5629 2000

f (603) 5629 2008

www.usgboral.com

Guarantee

Boral Plasterboard warrants goods manufactured and supplied by it to be of consistent quality and free from any defects. This warranty shall only apply when goods have been installed with the components and accessories as specified and in accordance with the detailed instructions set out in the Boral Plasterboard Technical Literature.



